



HKE 750/1500

Lifting and tilting equipment with electrohydraulic drive for containers up to 1,500 kg and taking heavy load carriers with floor rollers

- ▶ Low-maintenance electrohydraulic drive.
- ▶ Maximum tilt angle: 40°.
- ▶ Compact and space-saving design.
- ▶ Also can be used in narrow spaces.
- ▶ Front and side-loading possible
- ▶ Useful lift: 450 mm.
- ▶ Container stop available as an option.
- ▶ Low-maintenance and trouble-free operation due to high-quality, robust components.
- ▶ Optional: Sub-frame (Access clearance 100 mm)



HKE 750

i AREAS OF APPLICATION

- Lifting and tilting heavy load carriers with floor rollers due to the narrow design possible with the HKE 750
- Automobile and automobile supplier industries

TECHNICAL DATA

Equipment type	Load cap. (in kg)	Load handling (in mm)		Loading direction	Loading height (in mm)	Useful lift (in mm)	Tilt	Mobile possible
		BL	LL					
HKE 750	750	520	1.310	from the front	195	450	40°	X
HKE 1500	1.500	1.300	1.110	from the front	195	450	40°	X

Power: 400 V/50 Hz, 16 A, 5-pole. Paint: RAL 7035/7016




Contact and advice:

+49 7161 98442-0
verkauf@ventzki.de

Or use our questionnaire at

www.ventzki.de/anfrage

HKE 750/1500

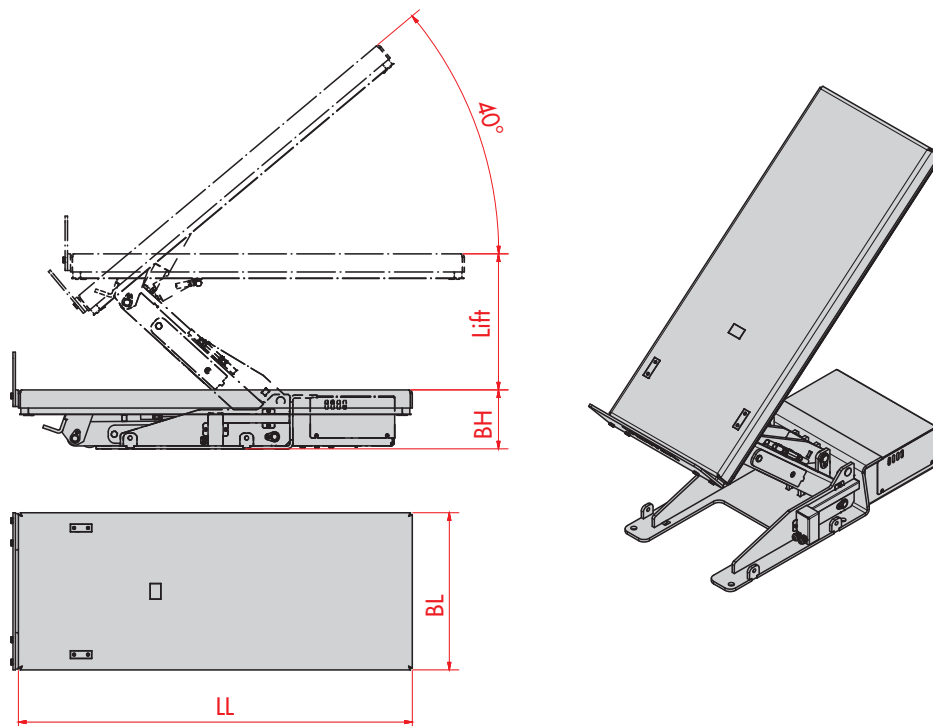

HKE 750

☀️ PRODUCT HIGHLIGHTS

- Screw-on container connection
- Compact and space-saving design
- Low loading height
- Stepless setting of the lifting and tilting function

🎬 PRODUCT FILM

HKE 750 at www.ventzki.de/produktfilme